

ITEM NO	QTY.	PART NO.	MATERIAL	SIZE	DESCRIPTION
1	1	---	316 SS	2 1/2" ANSI RF FLG	SUPPLY, H.W. OUTLET
2	1	---	VARIOUS	1 1/4" FNPT	PRESSURE RELIEF VALVE
3	1	---	316 SS	2 1/2" ANSI RF FLG	RETURN, C.W. INLET
4	1	---	CPVC	1 1/4"	CONDENSATE DRAIN
5	1	---	STEEL	2" NPT	GAS CONNECTION
6	1	---	316 SS	8"	VENT, EXHAUST FLUE
7	1	---	316 SS	8"	AIR INTAKE (STD. & OPT. LOCATION)
8	1	---	VARIOUS	---	DISPLAY, TEMPERATURE CONTROLLER

F

E

D

C

B

A

F



E

D



C

B

A

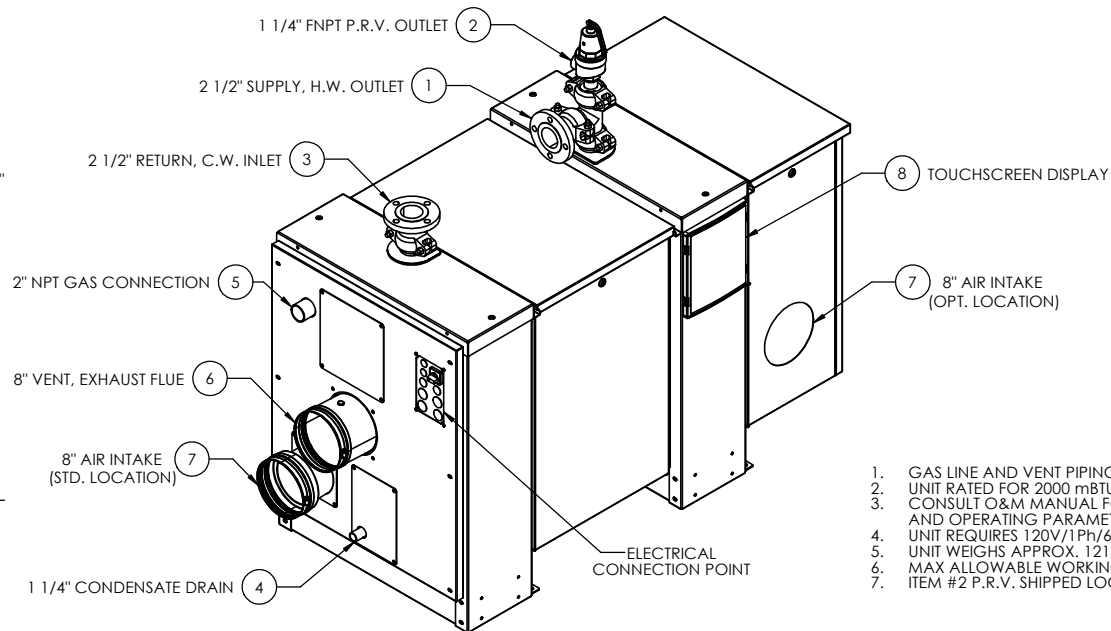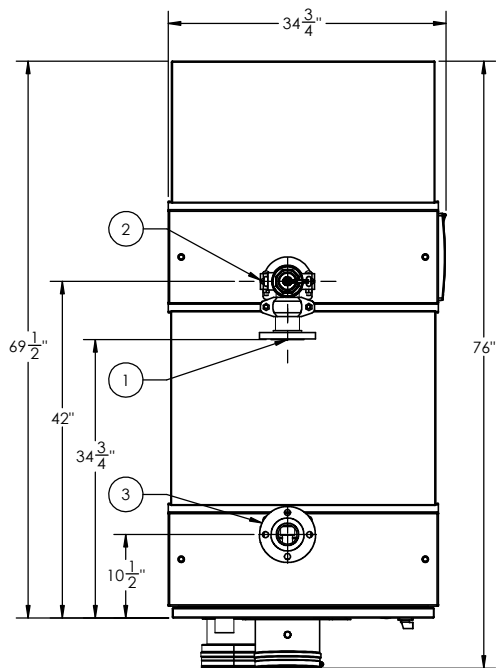

1. GAS LINE AND VENT PIPING TO BE SUPPLIED BY OTHERS
2. UNIT RATED FOR 2000 mBTU/HR
3. CONSULT O&M MANUAL FOR INSTALLATION REQUIREMENTS AND OPERATING PARAMETERS
4. UNIT REQUIRES 120V/1Ph/60Hz SUPPLY
5. UNIT WEIGHS APPROX. 1213 LBS DRY, 1348 LBS WET
6. MAX ALLOWABLE WORKING PRESSURE 145 PSI
7. ITEM #2 P.R.V. SHIPPED LOOSE

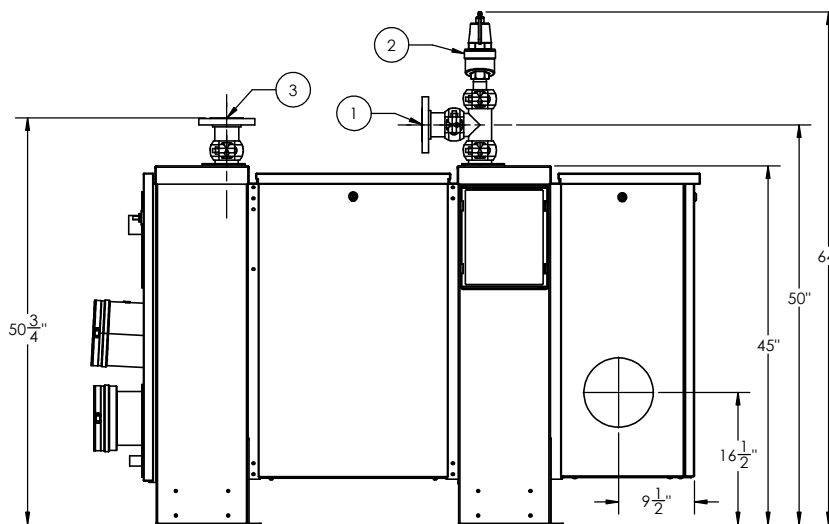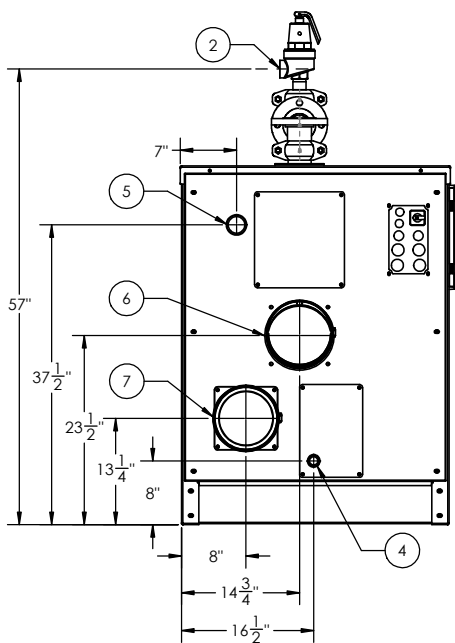

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
THE ELECTRIC HEATER COMPANY. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
THE ELECTRIC HEATER COMPANY IS
PROHIBITED.

ZONE REV.	DESCRIPTION	DATE	APPROVED
	REVISIONS		
DRAWN	DATE	NAME	
CHECKED	01/12/2024	JD	
ENG APPR.		TWG	
MFG APPR.			
Customer: MODEL E-2000			
Description: 2,000,000 BTU GAS HEATER			
120VAC - 1Φ - 60Hz			
SIZE	DWG. NO.	REV	
C	E 2000	-	
SCALE: 1:12 FSCM: 19857 SHEET 1 OF 1			

DIMENSIONS ARE IN INCHES
TOLERANCES:
(UNLESS OTHERWISE SPECIFIED)
FRACTIONAL ±1/16"
ANGULAR: MACH ±1/4" BEND ±1°
TWO PLACE DECIMAL ±0.01
THREE PLACE DECIMAL ±0.005