
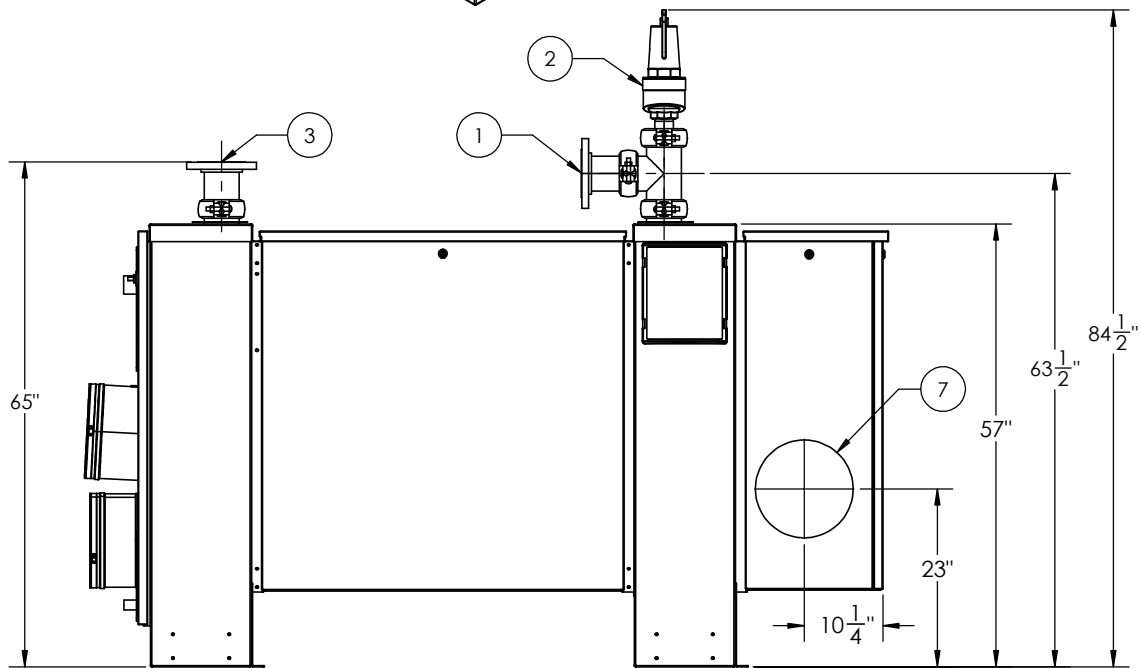
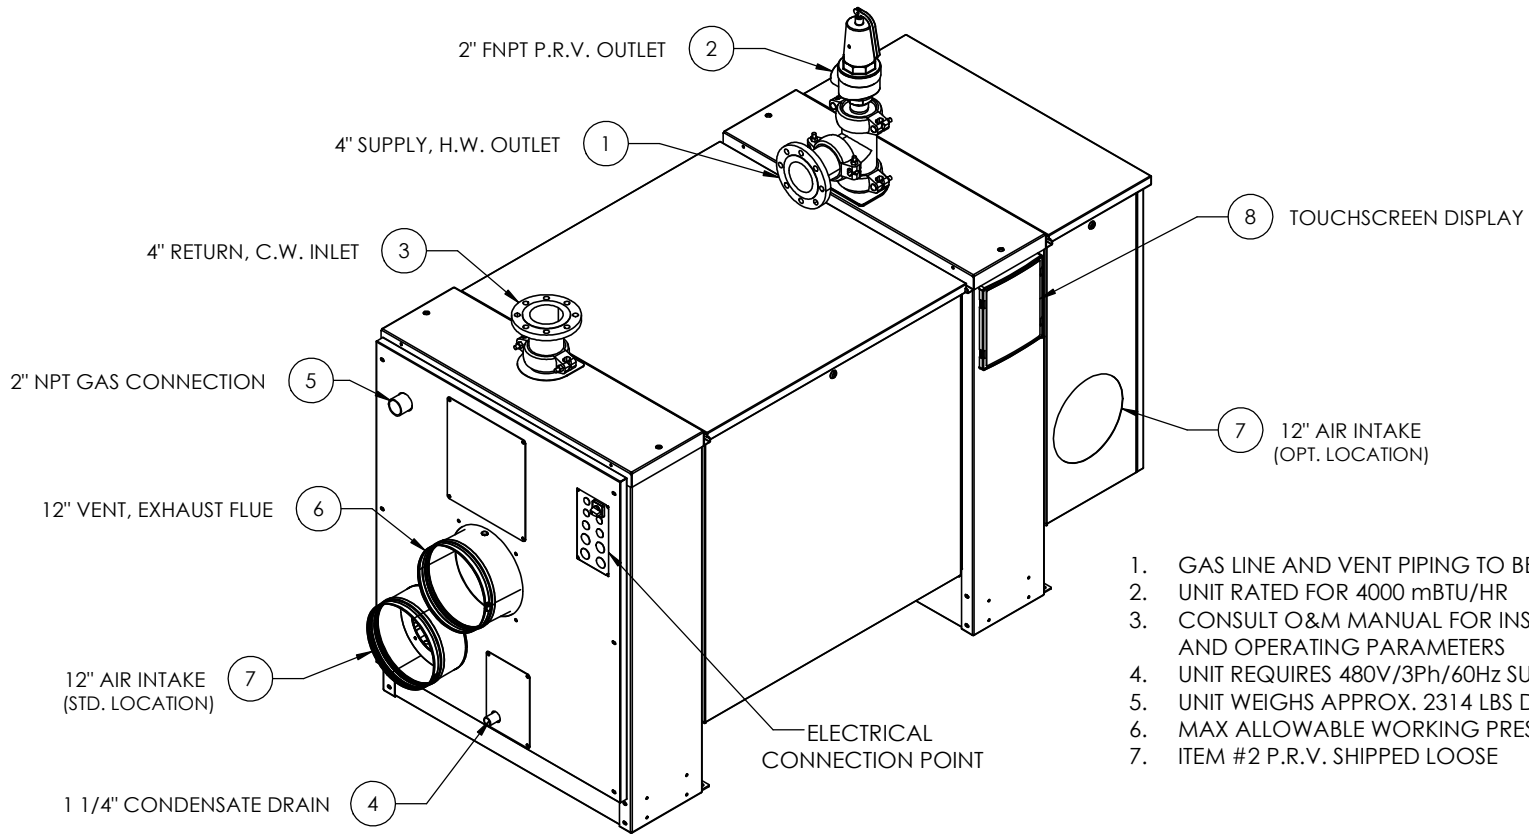
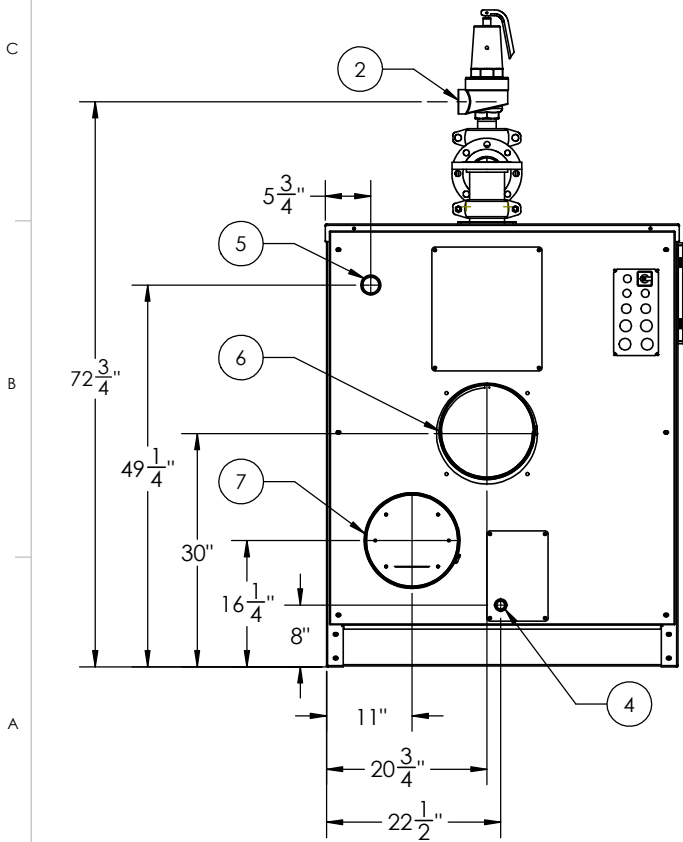


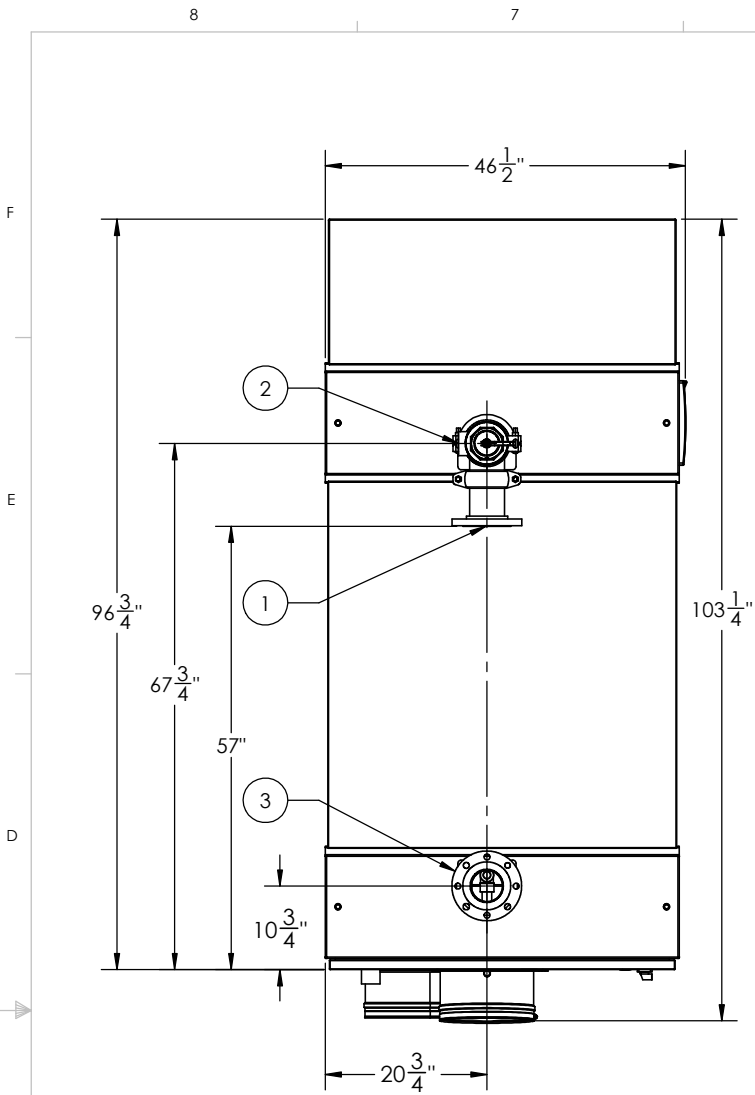

ITEM NO.	QTY.	PART NO.	MATERIAL	SIZE	DESCRIPTION
1	1	---	316 SS	4" ANSI RF FLG	SUPPLY, H.W. OUTLET
2	1	---	VARIOUS	2" FNPT	PRESSURE RELIEF VALVE
3	1	---	316 SS	4" ANSI RF FLG	RETURN, C.W. INLET
4	1	---	CPVC	1 1/4"	CONDENSATE DRAIN
5	1	---	STEEL	2" NPT	GAS CONNECTION
6	1	---	316 SS	12"	VENT, EXHAUST FLUE
7	1	---	316 SS	12"	AIR INTAKE (STD. & OPT. LOCATION)
8	1	---	VARIOUS	---	DISPLAY, TEMPERATURE CONTROLLER

1. GAS LINE AND VENT PIPING TO BE SUPPLIED BY OTHERS
2. UNIT RATED FOR 4000 mBTU/HR
3. CONSULT O&M MANUAL FOR INSTALLATION REQUIREMENTS AND OPERATING PARAMETERS
4. UNIT REQUIRES 480V/3Ph/60Hz SUPPLY
5. UNIT WEIGHS APPROX. 2314 LBS DRY, 2692 LBS WET
6. MAX ALLOWABLE WORKING PRESSURE 145 PSI
7. ITEM #2 P.R.V. SHIPPED LOOSE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
THE ELECTRIC HEATER COMPANY. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
THE ELECTRIC HEATER COMPANY IS
PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:
(UNLESS OTHERWISE SPECIFIED)
FRACTIONAL: ±1/16"
ANGULAR: MACH ±1/2° BEND ±1°
TWO PLACE DECIMAL ±0.01
THREE PLACE DECIMAL ±0.005

ZONE	REV.	DESCRIPTION	DATE	APPROVED
REVISIONS				
DRAWN	11/1/2023	RC	 Customer: MODEL E-4000 Description: 4,000,000 BTU GAS HEATER 480VAC - 3Φ - 60Hz	
CHECKED	01/12/2024	TWG		
ENG APPR.				
MFG APPR.				
SIZE	DWG.	REV	SCALE: 1:16 FSCM: 19857 SHEET 1 OF 1	
C	E 4000	-		